



AXA


Digital door spy DDS 1

Information


You have just acquired a high quality AXA product. The instructions below must be followed closely in order to effectively assemble and operate this product.

Assembly tools (recommended):

Tape measure, (battery) drill or screw machine, Ø 14 mm drill bit, pencil or awl.

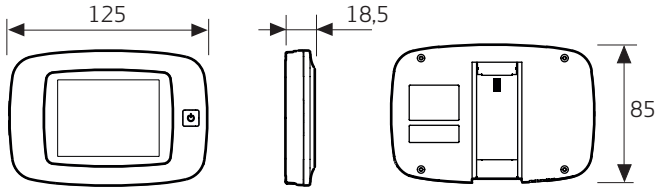

Assembly place


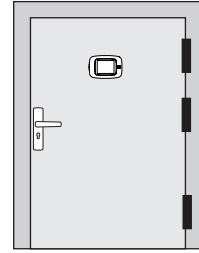


Use


Outside doors (door thickness 38 - 110 mm)

Package contents

- | | |
|--------------------------|-------------------------|
| 1. (1x) Digital door spy | 5. (1x) Washer |
| 2. (1x) M3 x 8 mm bolt | 6. (1x) Camera |
| 3. (4x) AAA Batteries | 7. (3x) Mounting sleeve |
| 4. (1x) Mounting plate | 8. (1x) Mounting key |

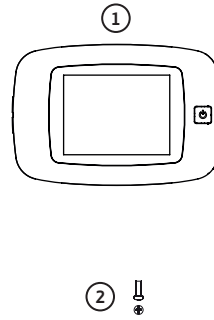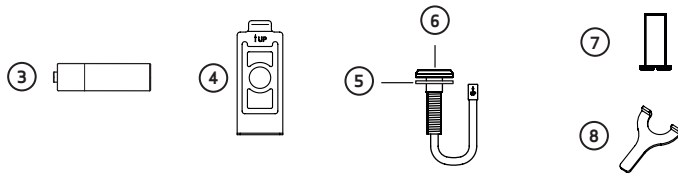

Placing the batteries

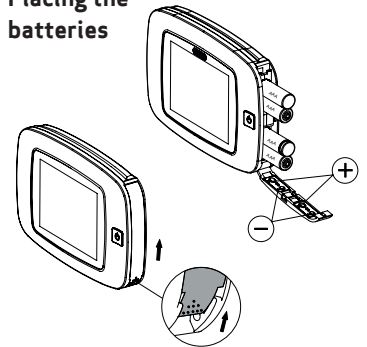

User manual

On/Off key:

Press On/Off key or turn the appliance on for 10 seconds.

Low battery:

When low battery icon is visible at right bottom display, the batteries should be replaced.

Specifications

Door thickness:	38-110 mm
Camera hole size:	Ø14 -22 mm
Sensor:	0.3 Mega Pixels CMOS
LCD screen:	3.2 inch TFT
Power:	4x AAA batteries
Dimensions (wxhxd):	125 x 68 x 15 mm
Weight:	180 gram



AXA

Digital door spy DDS 1

Assembly manual

For problem-free operation of this product you must follow the instructions below carefully.

Assembly

- 1 Place the batteries (3) in the door spy.
- 2 Replace the existing door spy or drill a hole (\varnothing 14 mm) at eye level. Insert the camera (6) with the washer (5) in between, through the door from the outside (figure A).



Do not fold or pull on the camera connecting cable



The arrow on the camera must point upwards

- 3 Disassemble the mounting plate (4) at the bottom of the screen (1) by unscrewing (2) the bolt (figure B).
- 4 Remove the foil of the double-sided tape on the back of the mounting plate (figure B).
- 5 Insert the camera connecting cable through the mounting plate and stick the mounting plate with the arrow pointing upwards, to the inside of the door. Screw the mounting sleeve (7) onto the camera thread using the mounting key (8) (figure C).



The arrow on the mounting plate must point upwards

- 6 Carefully connect the camera plug to the back of the screen.
- 7 Hook the screen over the top of the mounting plate and secure the unit using the bolt (figure D).
- 8 The AXA Digital door spy is ready for use.

