37-291.2 (8-25)




AXA HOME/SECURITY

EN

Door closer

Information


You have just acquired a high quality AXA product. The instructions below must be followed closely in order to effectively install and operate this product.

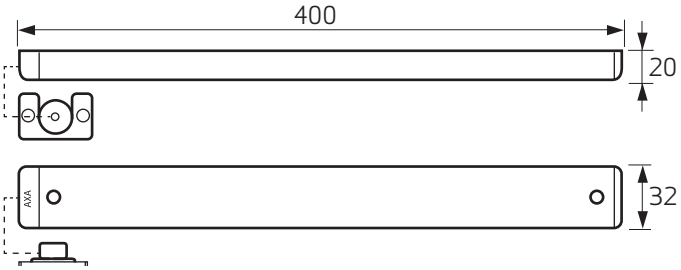


Application
Interior doors and kitchen cabinet doors.

Installation tools (recommended)
Tape measure, (battery) drill, screwdriver, drill Ø 5 mm, bradawl/pencil.

Mounting position
Left or right



Minimum installation space required



Recommended fasteners: 4,0 x 30 mm en 3,0 x 12 mm

User manual

During the summer period, you can easily temporarily disconnect the door closer by removing the end cap from the door plate.

37-291.2 (8-25)



AXA HOME SECURITY

EN

Door closer

Installation manual

1 Hold the tube housing on the inside of the top rail 3 mm from the door. Mark the drilling locations through the screw holes (pre-drill wooden frames with a 2 mm drill bit, pre-drill metal frames with a 3 mm drill bit).
2 Screw the tube housing in place using the long screws.
3 Close the door. Hold the door plate at the height of the tube housing. Secure the door plate with the two short screws (pre-drill Ø 1.5 mm).
4 The plastic cap at the end of the cord can now be slid into the metal door plate when the door is opened slightly.
The pulling force can be increased by shortening the cord slightly, but no more than 15 cm.

First, tie a new knot in the cord.

5 Drop the knot into one of the four recesses in the cap.
Test the pulling force. If it is satisfactory, cut off the excess piece of cord.

First tie knots and try it out, then cut.

